

## JetStream Cable Blowing Machine

The JetStream has been designed to provide maximum cable protection, combined with the performance and reliability of hydraulic drive. The profiled double drive belt system is driven by single 32cc hydraulic motor, powered by the proven Hydraulic power pack.

The electronic monitoring system provides read-out of speed and distance, gives protection against duct obstructions and includes emergency stop facility.

The JetStream is adjustable to suit a wide range of cable diameters 4-20mm, and duct diameters 12-50mm o/d.

### **Main Features**

- Automatic Cable Centralisation
- Synchronous high grip profiled drive belts
- Tabletop design
- Variable speed control
- Single person operation
- Digital cable speed and length monitoring
- Integral air valve and pressure gauge
- Easy cable threading
- Polycarbonate safety guarding
- Low maintenance
- Wheeled Travel case
- Tool kit

### Specification

<b>Cable Range:</b>	4-20mm
<b>Duct Range:</b>	12-50mm
<b>Cable Speed:</b>	85m/min
<b>Pushing Force:</b>	600N
<b>Maximum Air Pressure:</b>	15 Bar
<b>Drive Media:</b>	Hydraulic
<b>Drive Type:</b>	Profiled Belt
<b>Drive Orientation:</b>	Horizontal
<b>Cable Speed Measurement:</b>	Proximity Switch

### Shipping Specification (In Transit Case) JetStream Only

<b>Length:</b>	700mm
<b>Width:</b>	590mm
<b>Height:</b>	550mm
<b>Weight:</b>	60Kg



### Product No



W2250

### Description

JetStream Cable Blowing Machine

### JETSTREAM Configuration

In order to configure your JetStream to your application, we ask that you pick one of each from the list below, the cable collet assembly (A), the duct clamp and seal collets (B) and cable seals (C).

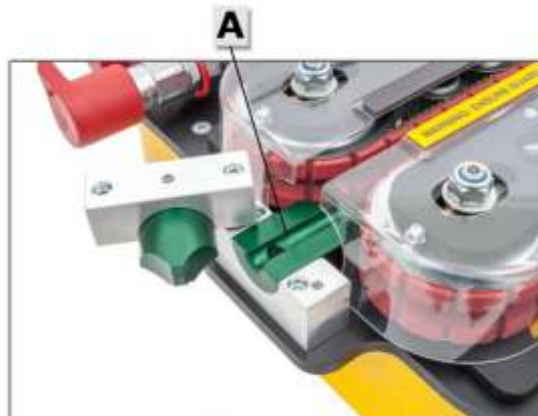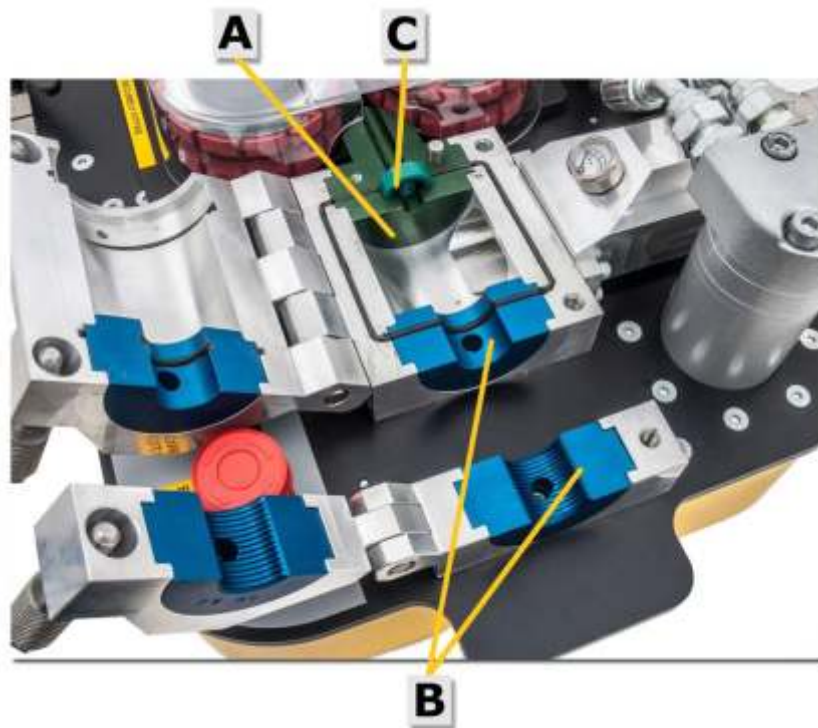

#### **(A) Cable Collet Assembly**



<u>Cable Diameter</u>	<u>Product No</u>
-----------------------	-------------------

4-6mm	W2250-CC0406
6-9mm	W2250-CC0609
9-12mm	W2250-CC0912
12-16mm	W2250-CC1216
16-20mm	W2250-CC1620

#### **(B) Duct Clamp & Seal Collets**



<u>Duct Dia (Outer)</u>	<u>Product No</u>
-------------------------	-------------------

12mm	W2250-DC12
14mm	W2250-DC14
16mm	W2250-DC16
18mm	W2250-DC18
20mm	W2250-DC20
25mm	W2250-DC25
32mm	W2250-DC32
40mm	W2250-DC40
50mm	W2250-DC50

## JETSTREAM Configuration - Continued

### (C) Cable Seals (Supplied in packs of 10)



<u>Cable Diameter</u>	<u>Product No</u>
4-5mm	W2250-CS0405
5-6mm	W2250-CS0506
6-7.5mm	W2250-CS0607
7.5-9mm	W2250-CS0709
9-10.5mm	W2250-CS0910.5
10.5-12mm	W2250-CS10.5-12
12-14mm	W2250-CS1214
14-16mm	W2250-CS14-16
16-18mm	W2250-CS1618
18-20mm	W2250-CS1820

### (D) Cable Seal Plug



<u>Cable Diameter</u>	<u>Product No</u>
4-5mm	W2250-SP0405
5-6mm	W2250-SP0506
6-7.5mm	W2250-SP0607
7.5-9mm	W2250-SP0709
9-10.5mm	W2250-SP0910
10.5-12mm	W2250-SP1012
12-14mm	W2250-SP1214
14-16mm	W2250-SP1416
16-18mm	W2250-SP1618
18-20mm	W2250-SP1820

### Tube Seal O Rings

Tube seals are supplied in packs of 5.



<u>Description</u>	<u>Product No</u>
Tube Seal O Rings 12mm	W2250-TS12
Tube Seal O Rings 14mm	W2250-TS14
Tube Seal O Rings 16mm	W2250-TS16
Tube Seal O Rings 18mm	W2250-TS18

**JETSTREAM –Drive Belts**

Drive belts are supplied in pairs. Please state the cable size when asking for belts.



**Product No**

W2250-DB2

**Description**

Drive Belt (Pair)  
6-20mm o/d cable



**Product No**

W2250-DB1

**Description**

Drive Belt (Pair)  
4-16mm o/d cable

### Hydraulic Power Pack

A trolley mounted hydraulic power pack with pre-set internal system protection relief valve and quick release connectors.

The unit is powered by an air-cooled, 8hp Honda GX240 petrol engine, delivering 15 litres/min at a working pressure of 115 bar from the hydraulic circuit. The circuit is protected with return line and suction filters.

The unit is mounted on a robust, wheeled trolley.

### Specification

Height:	615mm
Length:	720mm
Width:	530mm
Weight:	66kg
Hyd Oil Capacity:	5 Litres



### Product No

W2255

### Description

Hyd power pack c/w 7m hoses & electric lead